

CVLSH01 43" LED Stand Touch Screen Signage



Stand Type Signage

Intelligent Touch

Interactive Stand Type Signage is an intelligence touch control device which is developed as Intelligent Information dissemination terminal. The device can support an element of display such picture, video, audio, subtitle, date, time, weather, web page, HTML, word, excel, PPT, PDF, flash, RSS and other android platform program.

Smooth Touch

Support up to 6 point touch writing, smooth and fast feedback.

High Operation System

Build in Android as operation system.

Multiple Ports Design

Supports VGA, Audio, HDMI, USB, TOUCH, RJ45, RS232 and multichannel preview function.

Unrivaled Quality, Power Saving and Safety

High Quality Assurance, friendly using-experience

- International brand LED HD display panel configured to ensure better display quality and lower power consumption.


Intelligent Releasing and Interaction Integration System.

- Touching the screen to inquire and read any information as you want. It is very convenient for real-time news released and advertised.

Touch Support, sensitive input identification

- 6 point infrared touch technology links to fast response speed, strong light resistance and drive free features contribute to quite sensitive input identification.

Machine Size Chart- Unit (mm)

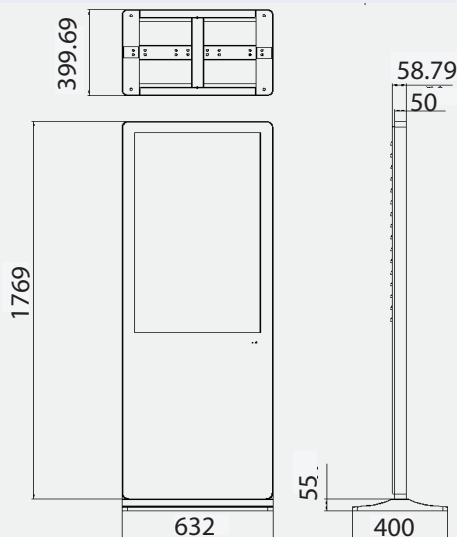

Specifications

	Model	CVLSH01
Panel	Screen Size	43" (16:9)
	Backlight / Lightsource	LED
	Resolution (Pixels)	1920 x 1080 pixels
	Brightness (Typical)	350cd/m2
	Contrast Ratio (Typical)	3,000:1
	Viewing Angle (Horizontal/Vertical)	178°/178°
	Response Time (ms)	15ms
	Working Temp.	0-50C
	Panel Bit (8 or 10)	8 bit
	Light Life (Typical)	80,000 hours
Glass	Refresh Rate	60Hz
	Tempered Glass	4mm, Tempered Glass
Touch	No. Of Touches	Unlimited
	Positioning Accuracy	More Than 90% of touch area +-2mm
	Touch Technology	IR Touch
	Numbers of Touch	6 Point touch
	Resolution (Points Area Function)	32,767*32,767
	Touch Interface	USB type B
Audio	OS Supported	Android 5.1 above, RK3368 Eight Core, 2G RAM, 8G onboard storage, network and display card
	Internal Speaker	5Wx2
	Line Out (Audio Out, 3.5mm)	x1
	Line In (3.5mm)	NA
	MIC (3.5mm)	x1
	Coax Output	x1
	AC Power	
	Power (AC) Input	x1
Power Switch	x1	
Basic IO		
Connectivity	VGA Input	NA
	VGA Output	x1
	HDMI Input	NA
	HDMI Output	x1
	Display Port	NA
	Slot-in-PC	x1
	OPS Slot	x2(USB 3.0)
	Legacy IO	
Control	SIM Card	x1
	USB Player (Photo, Video)	x2
	RS232 Input	NA
	RJ45 Port	x1
Power	Firmware Update	USB/OTA
	Voltage	100V-240V, 50/60Hz
Mechanical	Typical (Watt)	<130W
	Overall Dimension	632 x 1769 x 58.79mm
	Shell & Appearance	Aluminium Frame, Front Panel Glass
	Handle	N/A
RF	Pen Tray	NA
	NFC Reader / Writer	NA
OSD	On-Screen Display Languages	English
Package / Accessory	Remote Controller	NA
	Power Cord	x1(1.5m)
	Audio Cable	N/A
	VGA Cable	N/A
	Quick Start Guide	NA
	User's Manual Electronic File	x1
	USB Cable for Touch	N/A
	Touch Pen (Stylus)	NA
Optional	Certificate	x1
	Windows Licence	NA
	Embedded anti glare glass	Yes
	Andoid motherboard	Yes
Slot-in-PC	Yes	
Embedded Camera	NA	

Dealer's Stamp

