


CVBG-12 LCD 55" SIGNAGE

Smart Wall Type

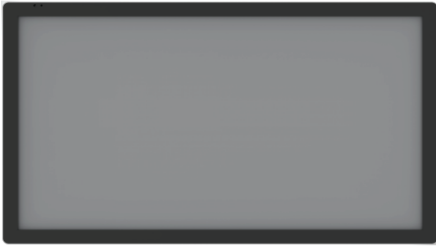

Smart Wall Type Signage

Intelligent

Smart Wall Type Signage is an intelligence control device which is developed at basic of large screen display and infrared touch* control technology. The device integrates TV, computer, android system and other function for education, business and public services.

Smooth Playback

Support most of all formats.

Operation System

Build in Android as operation system,

Multiple Ports Design

Supports VGA, Audio, USB, RJ45, RS232 and multichannel preview function.

Durable and heavy duty build

For safety purposes and last longer hour.

Unrivald Quality, Power Saving and Safety

High Quality Assurance, friendly using-experience

- International brand LED HD display panel configured to ensure better display quality and lower power consumption.


Intelligent Releasing and Interaction Integration System.

- Interact the screen to inquire and read any information as you want. It is very convenient for real-time news released and advertised.

Sensitive input identification

- Fast response speed, strong light resistance and drive free features contribute to quite sensitive input identification.

Machine Size Chart- Unit (mm)

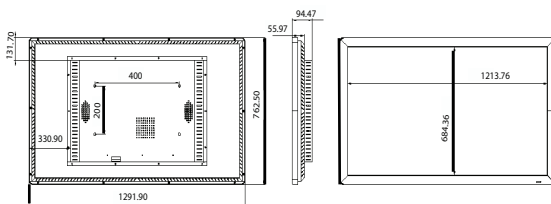

	Model	CVBG-12
Panel	Screen Size	55" (16:9)
	Backlight / Lightsource	LCD
	Resolution (Pixels)	1920x1080 pixel
	Brightness (Typical)	350cd/m2
	Contrast Ratio (Typical)	4,000:1
	Viewing Angle (Horizontal/Vertical)	178°/178°
	Response Time (ms)	15ms
	Color Gamut (x% NTSC)	72%
	Panel Bit (8 or 10)	8 bit
	Point Distance	0.21 x 0.63mm
Refresh Rate	60Hz	
Glass	Tempered Glass	4mm, Tempered Glass
Touch	No. Of Touches	NA
	Positioning Accuracy	More Than 90% of touch area +2mm*
	Touch Technology	NA
	Numbers of Touch	NA
	Visible Area	1213.76mm(H) x 684.36mm(V)
	Touch Interface	USB type B*
	OS Supported	Windows-1037U/13/15/17/(Optional) Android 5.1, 2G RAM
Audio	Internal Speaker	5Wx2
	Line Out (Audio Out, 3.5mm)	NA
	Line In (3.5mm)	x1
	MIC (3.5mm)	NA
	Coax Output	NA
Connectivity	AC Power	
	Power (AC) Input	x1
	Power Switch	x1
	Basic IO	
	VGA Input	NA
	VGA Output	NA
	HDMI Input	NA
	HDMI Output	NA
	Display Port	x1
	Slot-in-PC	x1
	OPS Slot	x1(USB 3.0)
	Legacy IO	
	SD & SIM Card	x1&x1
	USB Player (Photo, Video)	x3
	Control	RS232 Input
RJ45 Port		x1
Firmware Update		USB/OTA
Power	Voltage	100V-240V, 50/60Hz
	Typical (Watt)	<180W
Mechanical	Dimension (WxHxD) (mm)	1291.9 x 762.5 x 94.47mm
	Dimension With Bracket	N/A
	Handle	N/A
	Pen Tray	N/A
RF	NFC Reader / Writer	NA
OSD	On-Screen Display Languages	English
Package / Accessory	Remote Controller	x1
	Power Cord	x1(1.5m)
	Audio Cable	N/A
	VGA Cable	N/A
	Quick Start Guide	x1
	User's Manual Electronic File	x1
	USB Cable for Touch	N/A
	Touch Pen (Stylus)	NA
	Certificate	x1
	Optional	Nano Smart Pen
Embedded anti glare glass		NA
Micro-cross Star		NA
Slot-in-PC		Yes
Embedded Camera	NA	

Dealer's Stamp